

ALL Under Ridge Ventilation

Uni-Vent® II	UOM	Box Qty.	Pallet Qty.	Part Number
1" x 2" x 100'	EA	20 Pkgs	40 Pkgs = 2 Bx	63000001
1" x 2" x 50'	EA	40 Pkgs	80 Pkgs = 2 Bx	63000002
1" x 2" x 10'	Box	10 - 10' Rolls/Box	36 Boxes	63000010
1" x 2" x 20'	EA	100 Rolls	2 Boxes	63020001
1.25" x 2" x 25'	EA	56 Rolls	2 Boxes	63040001
1.25" x 1.5" x 20'	EA	125 Rolls	2 Boxes	63040002
1.5" x 2" x 25'	EA	56 Rolls	2 Boxes	63030002
1.75" x 2" x 25'	EA	56 Rolls	2 Boxes	63060000
2.25" x 2" x 25'	EA	54 Rolls	2 Boxes	63020020
1" x 1.5" x 20'	EA	135 Rolls	2 Boxes	63000004

Uni-Vent® III	UOM	Box Qty.	Pallet Qty.	Part Number
1.5" x 1.5" x 10'	Box	10 Rolls	54 Boxes	63600001
1.5" x 2" x 10'	Box	10 Rolls	36 Boxes	63600000
1" x 2" x 10' - R-Panel	Box	10 Rolls	36 Boxes	6360000R
1.5" x 1.5" x 124"	Box	10 Rolls	54 Boxes	63600002

Uni-Vent® Pro Series	UOM	Box Qty.	Pallet Qty.	Part Number
1" x 2" x 20' - 9" DC	EA	100 Rolls	2 Boxes	63720001
1" x 2" x 20' - 11.66" DC	EA	100 Rolls	2 Boxes	63720002
1" x 2" x 20' - 6" DC	EA	100 Rolls	2 Boxes	63720003
1" x 2" x 3' - 9" DC	Box	25 pc	40 Boxes	63720004

Ultra-X	UOM	Box Qty.	Pallet Qty.	Part Number
36" Ultra-X 9" DC	Box	50 pc	2 Boxes	61000000
36" Ultra-X 12" DC	Box	30 pc	2 Boxes	61000001
1x16-32 Standing Seam	Box	45 pc	2 Boxes	61200000
CD2000 9" DC	Box	50 pc	40 Boxes	61000002

X-Flex	UOM	Box Qty.	Pallet Qty.	Part Number
1" x 2" x 20' X-Flex	EA	100 Rolls	20 Boxes	69000002
1.25" x 2" x 20' X-Flex	EA	100 Rolls	20 Boxes	69000003
1" x 2" x 20' X-Flex Pro	EA	100 Rolls	20 Boxes	69000004
1" x 2" x 10' X-Flex (2Rolls/Pack)	PKG	100 PKGs	1 Box	69000005

Universal Ridge Clip	UOM	Box Qty.	Pallet Qty.	Part Number
1" Standing Seam Clip	Box	20 pc	-	64000000
1.5" Standing Seam Clip	Box	20 pc	-	64000001
1.75" Standing Seam Clip	Box	20 pc	-	64000002
2" Standing Seam Clip	Box	20 pc	-	64000003

XE®	UOM	Box Qty.	Pallet Qty.	Part Number
1.5" x 3' - 9"DC	Box	50 pc	30 Boxes	69000001
1.5" x 3' - R-Panel	Box	50 pc	30 Boxes	69000001R

X2®	UOM	Box Qty.	Pallet Qty.	Part Number
2" x 3' - 9"DC	Box	25 pc	40 Boxes	69000000
2" x 3' - R-Panel	Box	25 pc	40 Boxes	69000000R
2" x 32" - Standing Seam 1/16"	Box	20 pc	50 Boxes	69000000SS
2" x 3' - Apex (M-Panel)	Box	25 pc	40 Boxes	69000000M

CONTACT US

1015 32nd Ave West
Spencer, Iowa 51301
Office: 800-360-6467
Fax: 800-361-3452

www.mwicomponents.com



PRODUCT LINES:

Hardware Essentials & Track | Slide Frame
Ridge Ventilation
Soffit, Trim & Gable End Ventilation
Cupolas & Weathervanes
Box Girts
Dutch & Arcadian Doors
Horse Stalls
Reflective Insulation
Polycarbonate | PVC
Sealants & Retrofit Products
Building Accessories



All MWI ventilated products using polyethylene and cross-linked polyethylene materials are derived from recycled plastics.

©MWICOMPONENTS 2026



CONTROL THE BOARD,
PICK THE BEST
UNDER RIDGE
VENTILATION
FOR YOU!



With a wide variety of vented closures available, selecting the ideal fit can be challenging. MWI Components is here to assist you with all your Under Ridge Ventilation needs. **Compare** your options, **evaluate** the features, and **secure** the best choice for your project!



800-360-6467

MWICOMPONENTS.COM

UNI-VENT® II



SIZE:


- 2" wide & thickness of 1"
- Available in 20' or 100' packages
- Use on any roof pitch for 2/12 to 20/12
- Thicker R-Panel & other high rib profiles

SPECS:

- Net Free Area (NFA): 17 sq.in./LFT/ridge
- Airflow: 840 CFM/Sq.ft.
- Withstands 100 mph wind-driven rain
- Pure Polyurethane Foam
- Vinyl coating
- UV stabilizers/Fire Retardant
- Continuous Double Glue Strip
- 40 Year Warranty



ULTRA-X



Ag panel 9"OC

PROFILES:

- Ag panel 9"OC - (NFA: 11.4 sq.in./LFT)
 - Thickness: 1"
- R-Panel 12"OC - (NFA: 21 sq.in./LFT)
 - Thickness: 1.5"
- CD2000 9"OC - (NFA: 8.2 sq.in./LFT)
 - Thickness: 0.875"
- 1-16 Standing Seam - (NFA: 12 sq.in./LFT)
 - Thickness: 1.125"

SPECS:

- Airflow: 867 CFM./Sq. ft. average (720 cfm./sq. ft. minimum)
- Fire retardant & UV Stable
- 1 Strip of Continuous Glue
- Form-Fit Removes leak paths
- 1.8lb reticulated polyester vent material
- 1.5lb closed cell crosslinked polyethylene

X2®



SIZE:

- 2" wide by 3' long
- Hybrid cell: utilizing both closed and open cell technology

PROFILES:


- Ag Panel 9"OC
- R-Panel
- Standing Seam 1/16"
- Apex (M-Panel)

SPECS:

- Net Free Area (NFA): 17.5 sq.in./LFT/ridge
- Airflow: >760 CFM./Sq.ft.
- Made from Durable non-woven, modified vented PET Fibers
- UV Stabilized
- Continuous double glue strips



UNI-VENT® III



SIZE:

- 2" wide & thickness of 1.5"
- 10' pieces (10/box) - 100' packages
- 2 Pack of 10' Rolls available
- Use on any roof pitch for 2/12 to 20/12
- Thicker R-Panel & other high rib profiles

SPECS:

- Net Free Area (NFA): 17 sq.in./LFT/ridge
- Airflow: 840 CFM/Sq.ft.
- "Teeth" to prevent outside elements from entering.
- Higher Surface Area
- Pure Polyurethane Foam
- Vinyl coating
- UV stabilizers/Fire Retardant
- Continuous Pressure Sensitive Glue
- 40 Year Warranty

X-FLEX / X-FLEX PRO

PROFILES:

- X-Flex 1" x 2" x 20' (rib heights up to 3/4" tall.)
- X-Flex 1.25" x 2" x 20' (rib heights up to 7/8" tall.)
- X-Flex Pro 1" x 2" x 20' (rib heights up to 3/4" tall.)
- X-Flex 2 Rolls/Pack 1" x 2" x 10' (rib heights up to 3/4" tall.)

SPECS:

- NFA: 1" - 18.8 sq.in./LFT/ridge
- NFA: 1.25" - 22.3 sq.in./LFT/ridge
- Airflow: >760 CFM./Sq.ft.
- Durable non-woven, modified vented PET fibers
- UV Stabilized
- Continuous pressure sensitive adhesive



1" x 2" x 20' X-Flex Pro

XE®



SIZE:

- 1.5" wide by 3' long
- Hybrid cell: utilizing both closed and open cell technology

PROFILES:

- Ag Panel 9"OC
- R-Panel

SPECS:

- Net Free Area (NFA): 17.5 sq.in./LFT/ridge
- Airflow: >760 CFM./Sq.ft.
- Made from Durable non-woven, modified vented PET Fibers
- UV Stabilized
- Continuous double glue strips

UNI-VENT® PRO-SERIES



Ag panel 9"OC

SIZE:

- 2" wide & thickness of 1"

PROFILES:

- 9"OC - Roll
- 9" OC - 3' Stick
- 6"OC (7-Rib) - Roll
- 11.66"OC (4-RIB) - Roll

SPECS:

- Net Free Area (NFA): 17 sq.in./LFT/ridge
- Airflow: 840 CFM/Sq.ft.
- Withstands 100 mph wind-driven rain
- Pure Polyurethane Foam
- Vinyl coating
- UV stabilizers/Fire Retardant
- Continuous Double Glue Strip
- 40 Year Warranty




UNIVERSAL RIDGE CLIP

- **Compatible with Uni-Vent II UVRS**
- Designed for standing seam roofs
- 22 ga. galvanized clip provides a large fastening area for ridge caps
- Fasteners do not penetrate the panel or standing seam, protecting against weather
- Simplifies termination of roof panel tops
- Eliminates field cutting and "z" closures
- Allows ventilation between standing seams without penetration

Available Sizes:

- 1"
- 1.5"
- 1.75"
- 2"

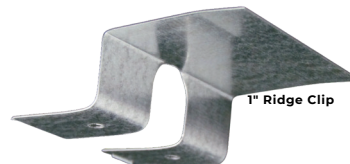

1" Ridge Clip

CHECKMATE SEALANTS AND RETROFIT PRODUCTS

UNI-SEAL®

Valley & Hip Closure Material.
Eliminates the need for angle-cut closures.
Continuous Pressure Sensitive Glue

LABOR SAVER

Roll directly over shingles and install new metal panels on top of Labor Saver.
Creates an air gap that allows for air flow between old and new roofs.

CLOSURES

Dense strips of polyethylene foam designed to seal and eliminate the gap between the roof deck and the panel.

